




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.1

EFFECTIVE:
Jan 12, 2017

PAGE:
1 of 30

WF Wayfinding bay number must correspond to bay ID label

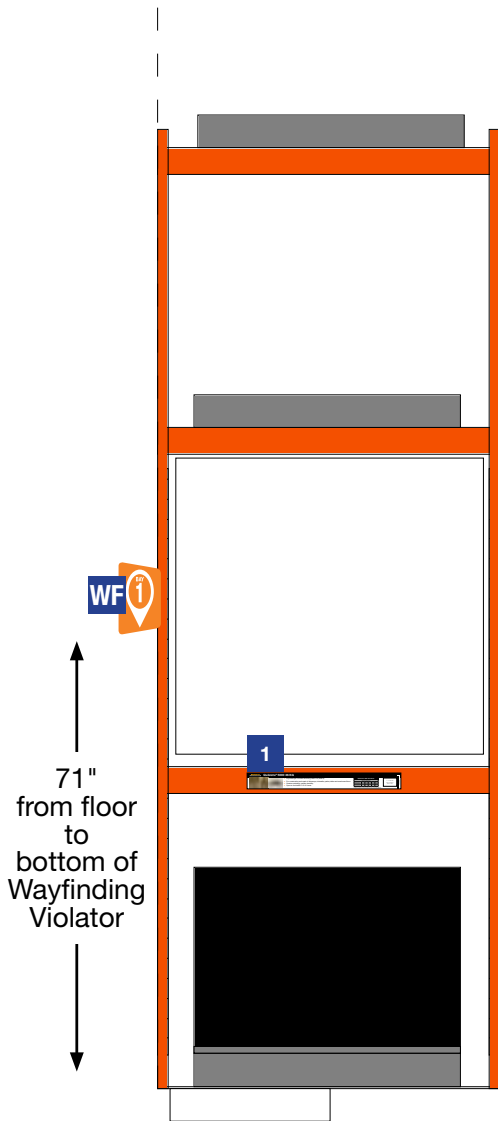

1

QUIKRETE

Quikrete® 5000 36 KG



- High strength concrete achieving 5000 PSI (34MPa)
- For construction and repair of driveways, sidewalks, patios, slabs and warehouse floors
- Greater workability, greater durability
- Open to foot traffic in 10-12 hours

Square Feet (m ²)	Quikrete® 5000 Calculator				
	Bags (No. of 36kg bags)				
2 (0.3)	5 (0.6)	10 (0.9)	25 (2.3)	50 (4.7)	
4' (120mm) thick	1	3	5	13	25
6' (150mm) thick	2	4	8	19	38

2" x 1.25" price label
Article #: 100043116
Model #: 100739



All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.1

EFFECTIVE:
Jan 12, 2017

PAGE:
2 of 30

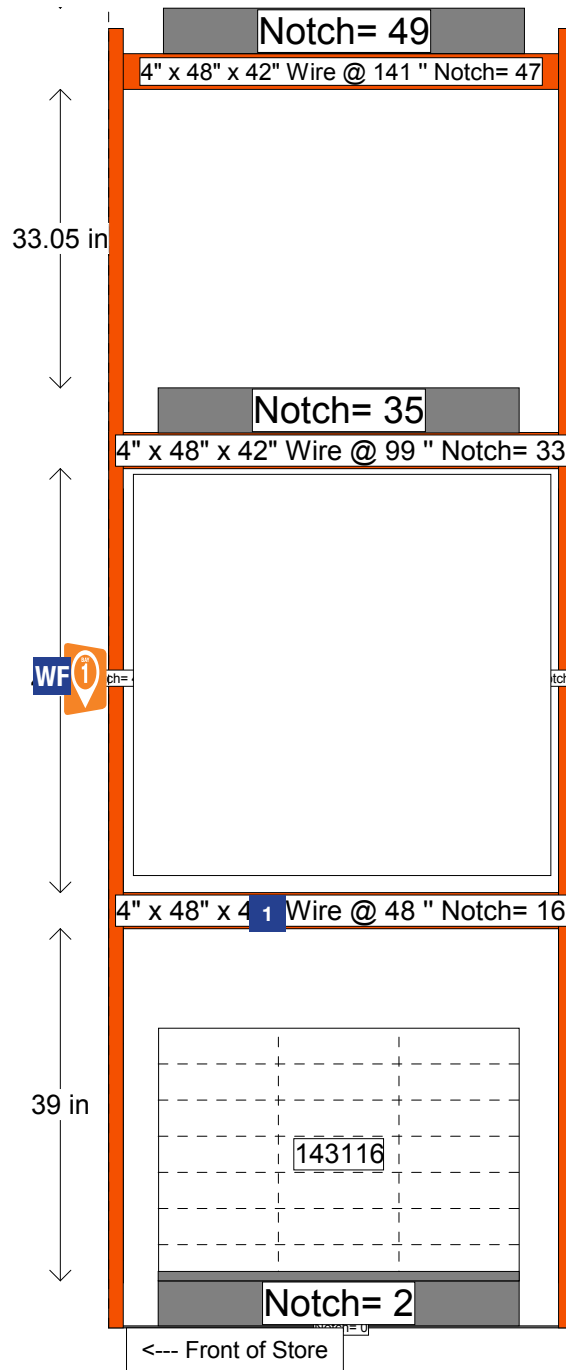

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
1	D22028C-53	Quikrete® 5000 36 KG	1	1000143116	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.2

EFFECTIVE:
Jan 12, 2017

PAGE:
3 of 30

WF Wayfinding bay number must correspond to bay ID label

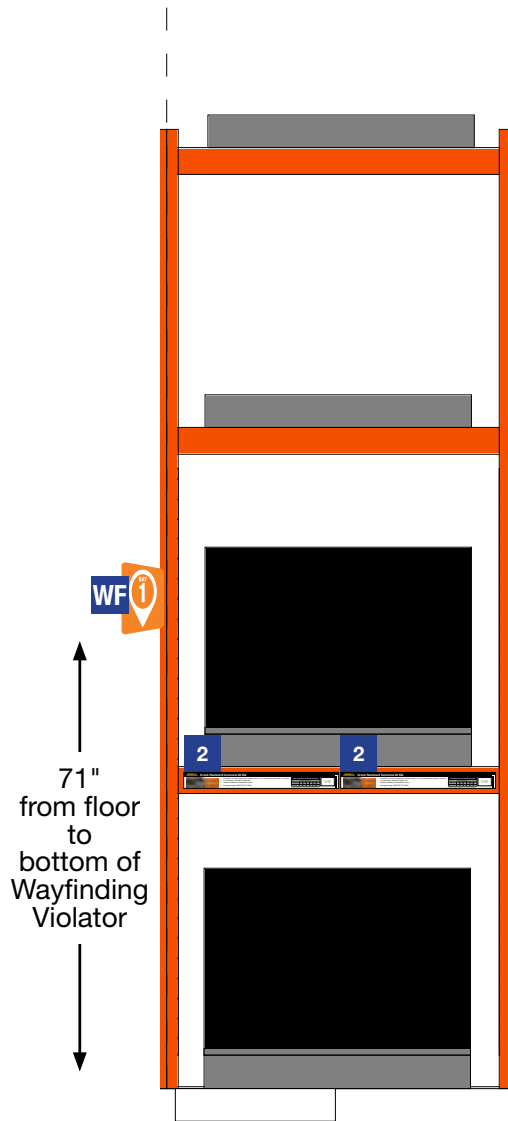

2

QUIKRETE Crack Resistant Concrete 30 KG



- A specialty concrete designed to reduce cracks in the construction and repair of concrete
- For driveways, sidewalks, patios, etc.
- Greater durability to freeze/thaw cycles
- Average strength 4000 PSI (27.6 MPa)

Crack Resistant Concrete Mix Calculator

Square Feet (sq)	Slabs (No. of 30kg (66lb) bags)				
	2 (0.2)	5 (0.5)	10 (0.9)	25 (2.3)	50 (4.7)
4" (100mm) thick	2	4	7	17	33
6" (150mm) thick	2	5	10	25	50

2" x 1.25" price label
Article #: 1000132401
Model #: 100588

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.2

EFFECTIVE:
Jan 12, 2017

PAGE:
4 of 30

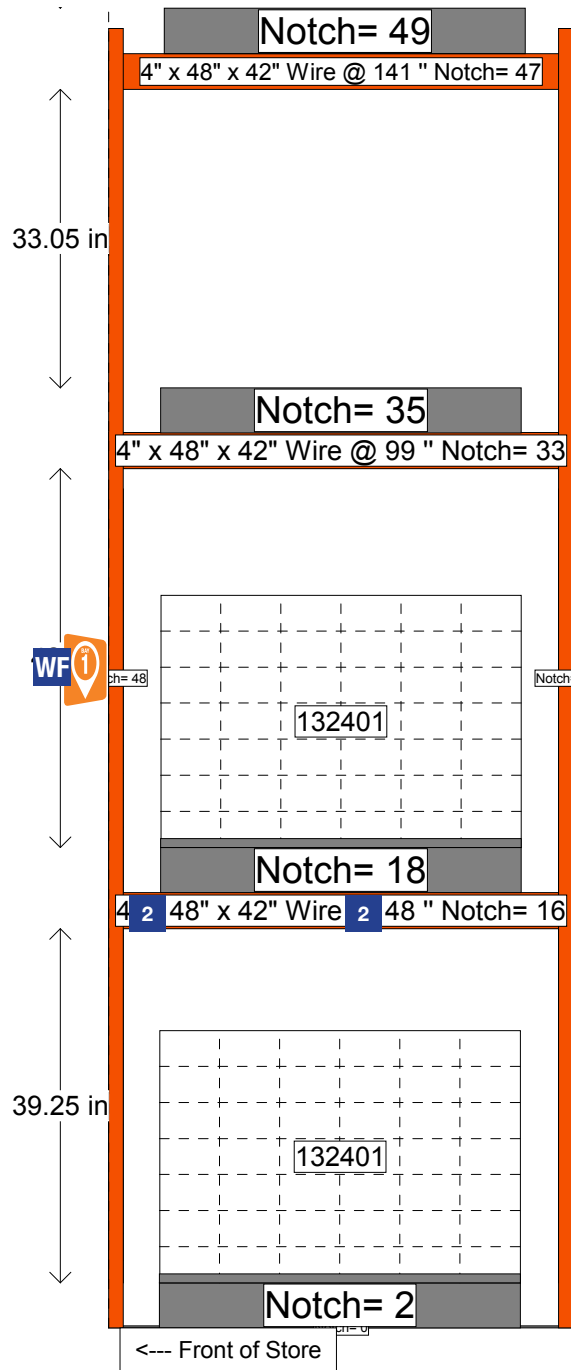

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
2	D22028C-62	Crack Resistant Concrete 30 KG	2	1000132401	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.3

EFFECTIVE:
Jan 12, 2017

PAGE:
5 of 30

WF Wayfinding bay number must correspond to bay ID label

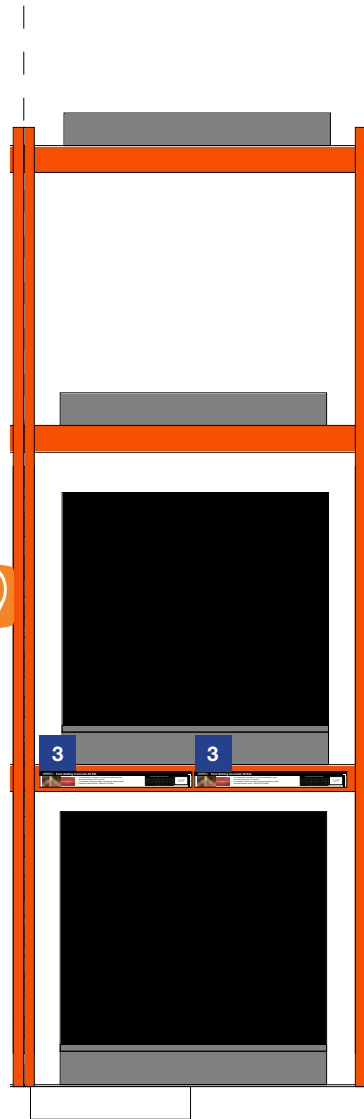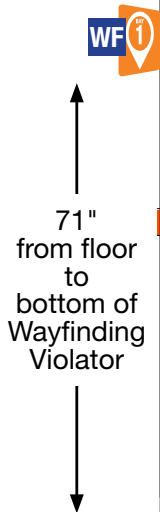

3

QUIKRETE Fast-Setting Concrete 30 KG



- For construction and repair of concrete and setting of posts where rapid setting time is required
- For sidewalks, driveways, patios, footings and setting of posts
- Sets posts without mixing - 4000 PSI (27.6 MPa)

Fast-Setting Concrete Mix Calculator					
Setting					
Depth of hole in inches (mm)	18 (456)	24 (609)	30 (762)	36 (914)	42 (1067)
Number of bags (50kg bags)	2	2	3	4	4
Feet of concrete (100kg bags @ 1000mm)	2	2	3	4	4
Shelf					
Number bags (50kg)	2 (20)	3 (30)	4 (40)	5 (50)	6 (60)
# Thick (100mm) # of 30kg (66lb) bags	2	4	7	10	12
# Thick (100mm) # of 20kg (44lb) bags	3	5	8	11	13

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

2' x 1.25' price label
Article #: 1000149586
Model #: 100467

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.3

EFFECTIVE:
Jan 12, 2017

PAGE:
6 of 30

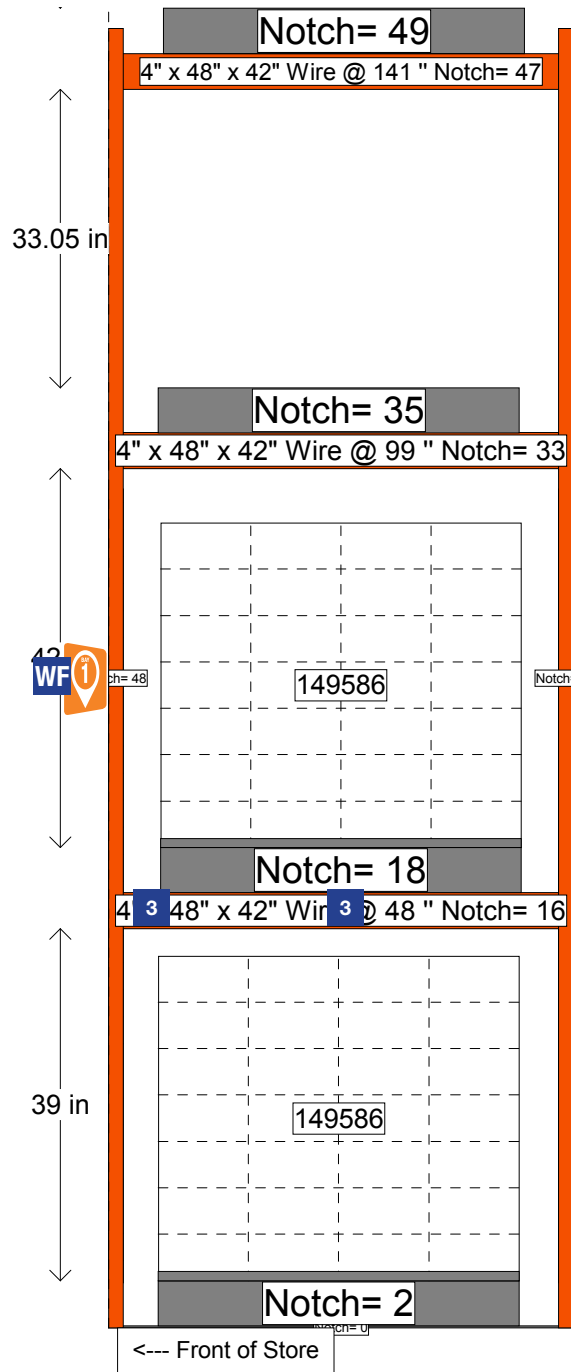

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
3	D22028C-34	Fast-Setting Concrete 30 KG	2	1000149586	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.4

EFFECTIVE:
Jan 12, 2017

PAGE:
7 of 30

WF Wayfinding bay number must correspond to bay ID label

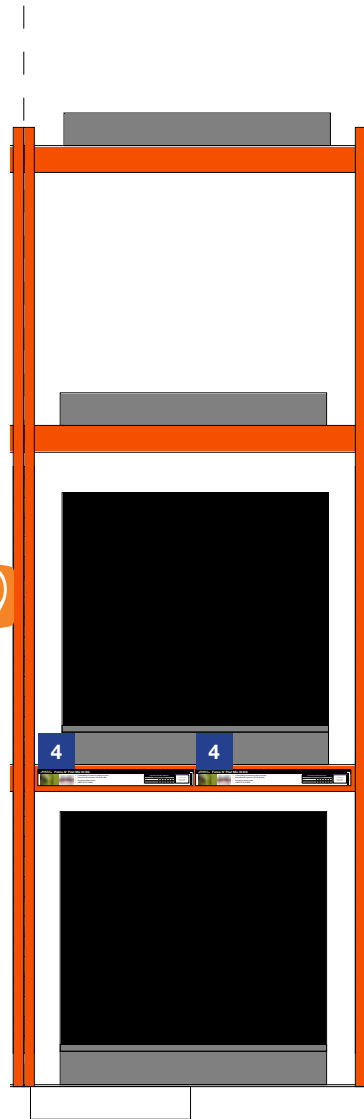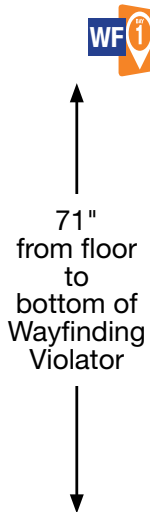

4

QUIKRETE Fence N' Post Mix 30 KG



- A fast setting concrete for setting of posts
- Sets all kinds of posts in 20-40 minutes
- No need to brace posts
- 4000 PSI (27.6 MPa)

Fence N' Post® Mix Calculator						
Setting posts (No. of bags per hole)						
Depth of hole in inches (300mm)	18 (457)	24 (611)	30 (762)	36 (914)	42 (1067)	48 (1220)
Post 3" (75mm) - Hole dia. 9" (230mm)	2	2	3	3	4	4
Post 4" (100mm) - Hole dia. 9" (230mm)	2	3	4	5	6	7

2" x 125" price label
Article #: 1000149587
Model #: 110531

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.4

EFFECTIVE:
Jan 12, 2017

PAGE:
8 of 30

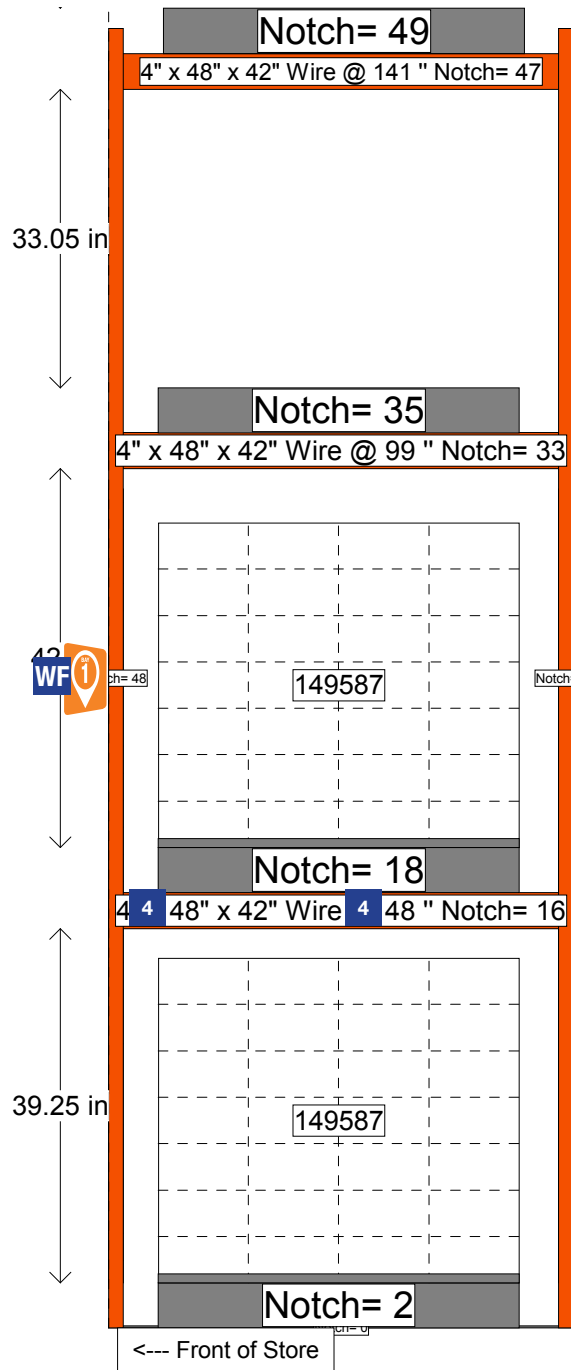

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
4	D22028C-32	Fence N' Post Mix 30 KG	2	1000149587	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP



Sign Planogram: Concrete - Quikrete


Bay Name: Concrete 14.5


EFFECTIVE:
Jan 12, 2017

PAGE:
9 of 30

WF Wayfinding bay number must correspond to bay ID label



WF 
71"
from floor
to
bottom of
Wayfinding
Violator

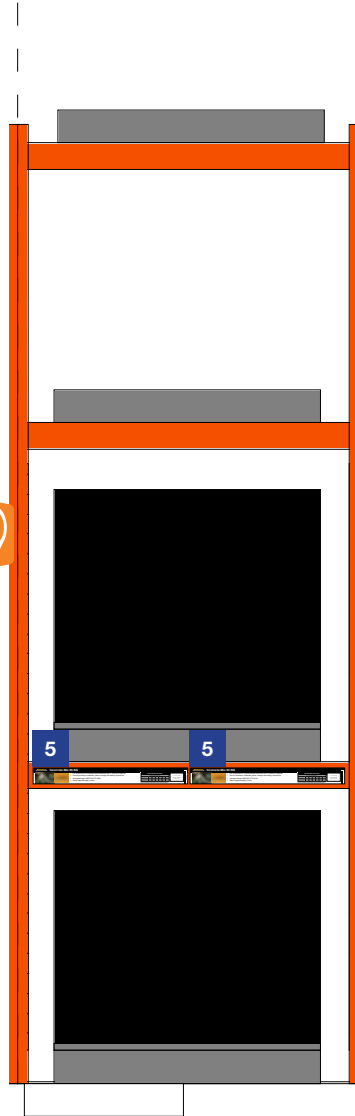

5

QUIKRETE

Concrete Mix 30 KG



- For construction of concrete where thickness over 2" (50mm) is required
- Use for driveways, sidewalks, patios, footings and setting of posts etc.
- Average strength 4000 PSI (27.6 MPa)
- Sets in approximately 4 hours

Concrete Mix Calculator				
	Bags (No. of 20kg (44lb) bags)			
Square Feet (m ²)	2 (5.2)	5 (11.0)	10 (21.8)	100 (11.3)
4" (102mm) thick	2	4	7	33
5" (127mm) thick	2	5	10	50

2" x 1.25" price label
Article #: 1000149580
Model #: 110187



All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.5

EFFECTIVE:
Jan 12, 2017

PAGE:
10 of 30

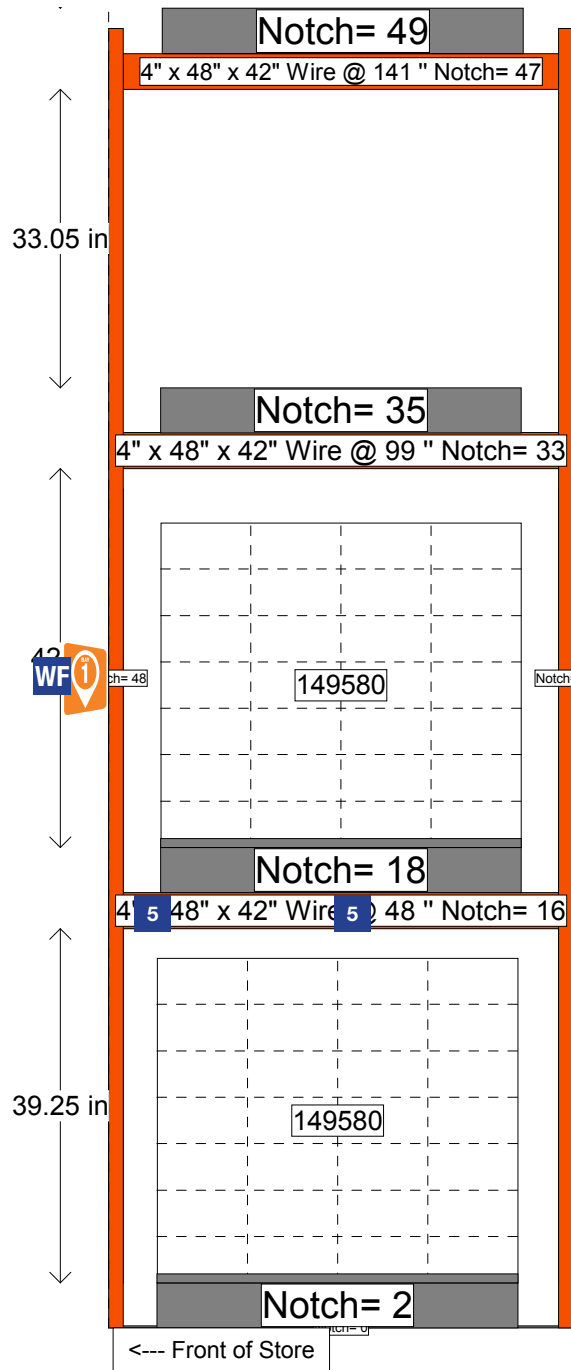

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
5	D22028C-54	Quikrete® Concrete Mix 30 KG	2	1000149580	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP



Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.6


EFFECTIVE:
Jan 12, 2017

PAGE:
11 of 30

WF Wayfinding bay number must correspond to bay ID label



WF 71" from floor to bottom of Wayfinding Violator

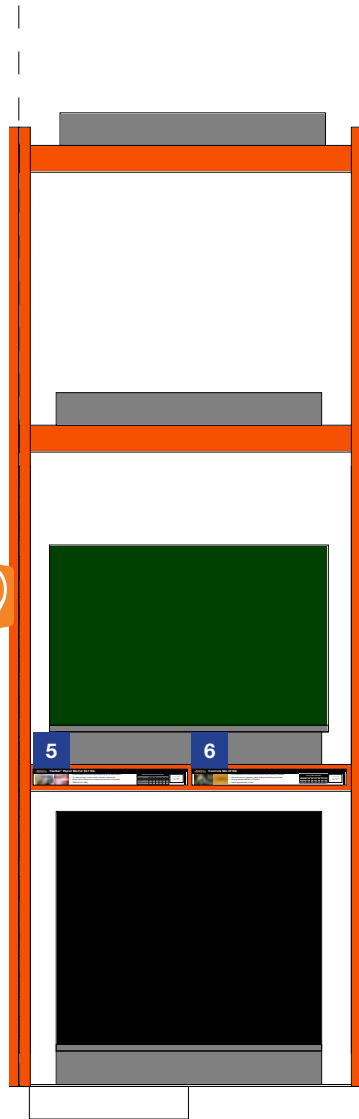

5

QUIKRETE FastSet™ Repair Mortar 22.7 KG



- A rapid setting structural mortar for repairing all concrete surfaces
- For walls, bridges, tunnels, sewers, culverts, columns, etc.
- Bonds well to vertical and overhead surfaces, sets in 20 minutes
- 6000 PSI (41.4 MPa)

Square Feet (m ²)	No. of 22kg (50lb) bags				
	2 (0.2)	5 (0.5)	10 (0.9)	15 (1.4)	20 (1.8)
1" (25mm) thick	1	2	3	4	5
2" (50mm) thick	1	2	4	5	7
3" (75mm) thick - (includes with 1/2 bag (22lb) 1" (25mm) gravel per bag)	1	2	4	6	10
4" (100mm) thick - (includes with 1 1/2 bag (33lb) 1" (25mm) gravel per bag)	1	3	5	9	15

2" x 1.25" price label
Article #: 100049589
Model #: 124152

6

QUIKRETE Concrete Mix 30 KG



- For construction of concrete where thickness over 2" (50mm) is required
- Use for driveways, sidewalks, patios, footings and setting of posts etc.
- Average strength 4000 PSI (27.6 MPa)
- Sets in approximately 4 hours

Square Feet (m ²)	Slabs (No. of 30kg (66lb) bags)				
	2 (0.2)	5 (0.5)	10 (0.9)	25 (2.3)	50 (4.6)
4" (100mm) thick	2	4	7	17	33
6" (150mm) thick	2	5	10	25	50

2" x 1.25" price label
Article #: 100049580
Model #: 110167

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.6

EFFECTIVE:
Jan 12, 2017

PAGE:
12 of 30

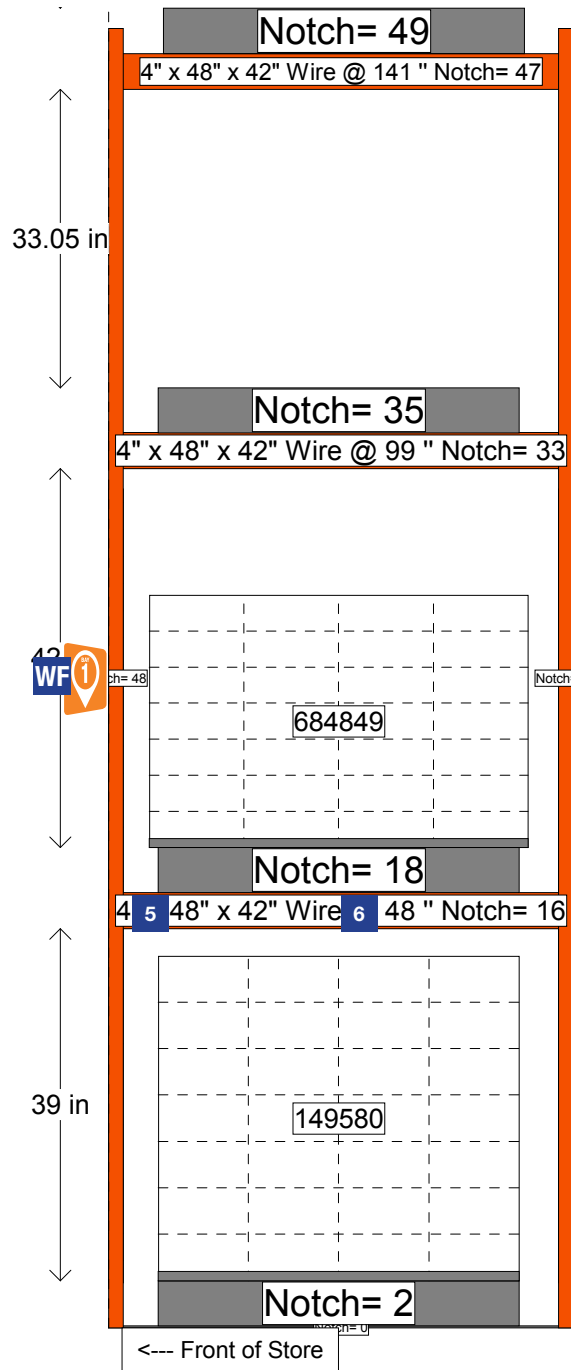

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
5	D22028C-68	Quikrete® FastSet™ Repair Mortar 22.7 KG	1	1000684849	-	ePOP
6	D22028C-54	Quikrete® Concrete Mix 30 KG	1	1000149580	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP

Merchandising POG shown is for POP reference only and is not to be used to set product. Refer to your store specific Merchandise POG for product placement.





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.7

EFFECTIVE:
Jan 12, 2017

PAGE:
13 of 30

WF Wayfinding bay number must correspond to bay ID label

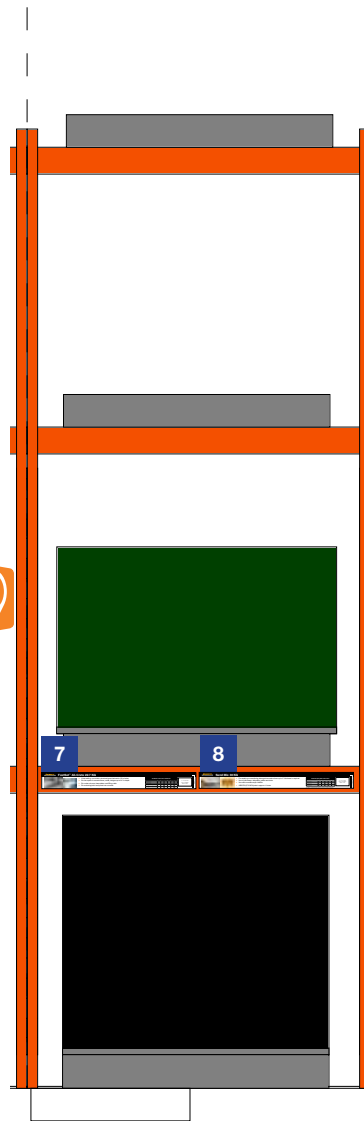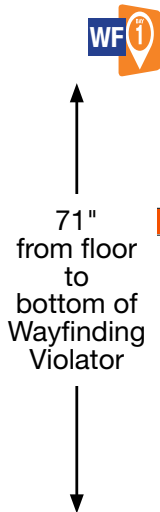

7

QUIKRETE FastSet™ All-Crete 22.7 KG



- A fast setting, non-shrink, structural grout that sets in 30 minutes
- For the repair of concrete floors, roads, bridges up to 24" in depth
- For under columns, base plates and filling voids
- For anchoring bolts and posts into concrete

Square Feet (sq ft)	No. of 22kg (50lb) bags				
	2 (0.2)	5 (0.5)	10 (0.9)	15 (1.4)	20 (1.8)
1" (25mm) thick	1	2	3	4	5
2" (50mm) thick	1	2	4	5	7
3" (75mm) thick - (includes with 1/2 bag (22kg) 1" (25mm) gravel per bag)	1	2	4	6	10
4" (100mm) thick - (includes with 1 1/2 bag (33kg) 1" (25mm) gravel per bag)	1	3	5	9	15

2" x 1.25" price label
Article #: 10008847
Model #: 198193

8

QUIKRETE Sand Mix 30 KG



- For repairing or resurfacing damaged concrete where up to 2" thickness is required
- Use on driveways, sidewalks, patios and slabs
- Use with concrete acrylic fortifier
- 4000 PSI (27.6 MPa) sets in approx. 4 hours

Square Feet (sq ft)	No. of 30kg (66 lb) bags required for 1" or 2" topping				
	5 (0.5)	10 (0.9)	20 (1.8)	35 (3.3)	50 (4.7)
1" (25mm) thick	1	2	4	6	8
2" (50mm) thick	2	4	7	12	17

2" x 1.25" price label
Article #: 100049585
Model #: 110930

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.7

EFFECTIVE:
Jan 12, 2017

PAGE:
14 of 30

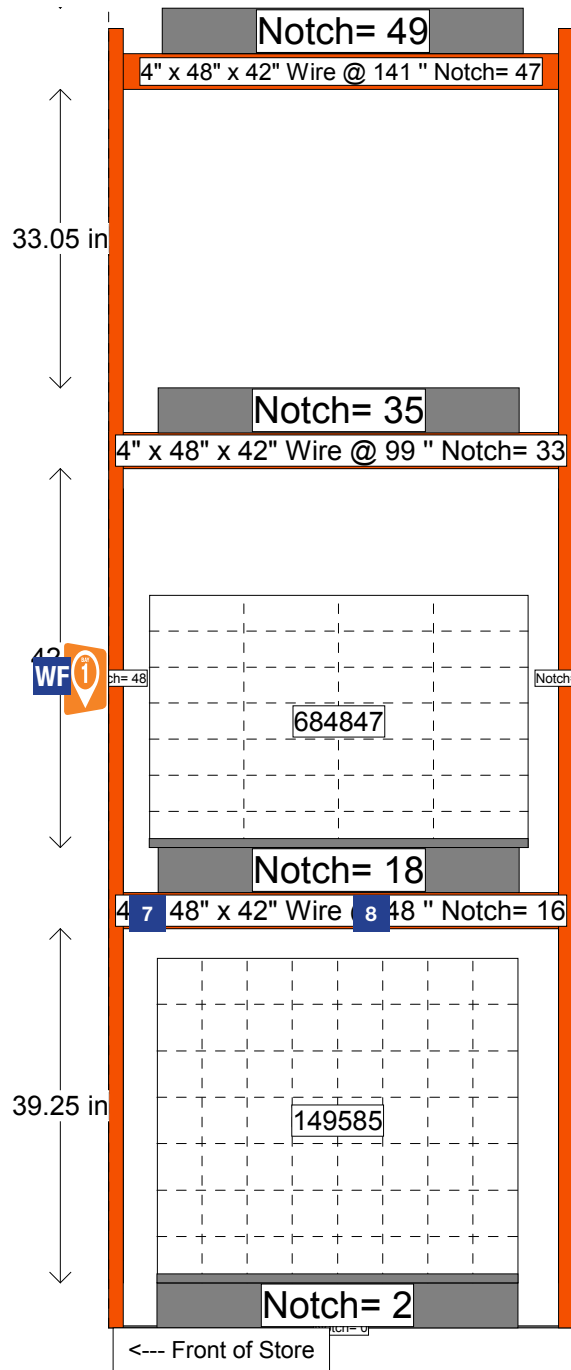

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
7	D22028C-69	Quikrete® FastSet™ All-Crete 22.7 KG	1	1000684847	-	ePOP
8	D22028C-56	Quikrete® Sand Mix 30 KG	1	1000149585	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP

Merchandising POG shown is for POP reference only and is not to be used to set product. Refer to your store specific Merchandise POG for product placement.





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.8

EFFECTIVE:
Jan 12, 2017

PAGE:
15 of 30

WF Wayfinding bay number must correspond to bay ID label

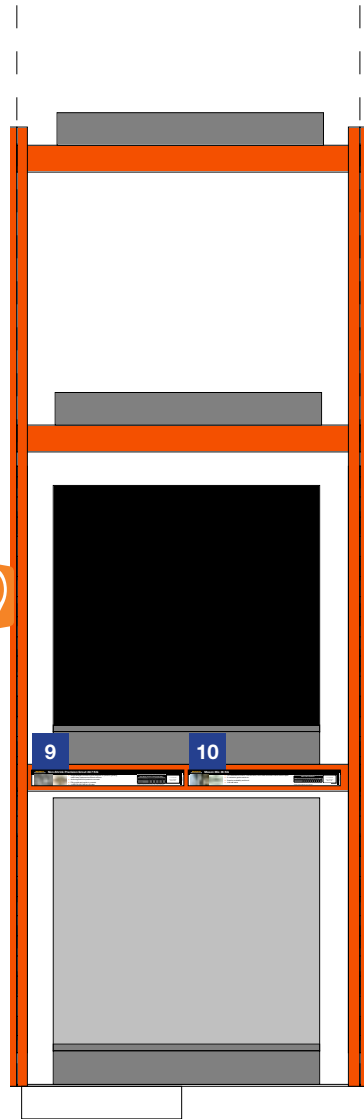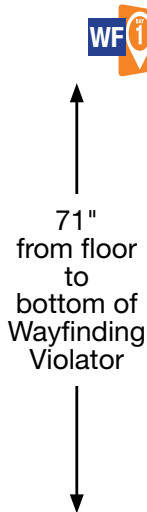

9

QUIKRETE Non-Shrink Precision Grout 22.7 KG



- A high strength non-shrink grout designed for precision grouting under heavy equipment and steel columns
- Anchoring bolts and posts into concrete
- Filling voids and cracks in concrete
- 14,000 PSI (96.5 MPa) in 28 days

Non-Shrink Precision Grout Calculator

Square Feet (m ²)	No. of 22.7kg (50lb) bags			
	2 (0.2)	5 (0.5)	10 (0.9)	15 (1.4)
1" (25mm) Thick	1	1	2	3
2" (50mm) Thick	1	2	4	6
3" (75mm) Thick	2	3	6	9

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

2" x 1.25" price label
Article #: 1000436515
Model #: 158500



10

QUIKRETE Mason Mix 36 KG



- For construction of brick, concrete block, stone walls and base coat for stucco repair
- A contractor grade mortar mix
- Superior workability and bond
- Just add water

Mason Mix Calculator

No. of bricks (standard)	No. of bags required to lay bricks and blocks 20" joint @ mm"							
	30	50	75	100	180	250	400	800
No. of 36.3kg (80lb) bags	1	2	3	3	5	7	11	22

* Estimated amount needed with a typical waste factor.

2" x 1.25" price label
Article #: 1000110313
Model #: 113059



Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.8

EFFECTIVE:
Jan 12, 2017

PAGE:
16 of 30

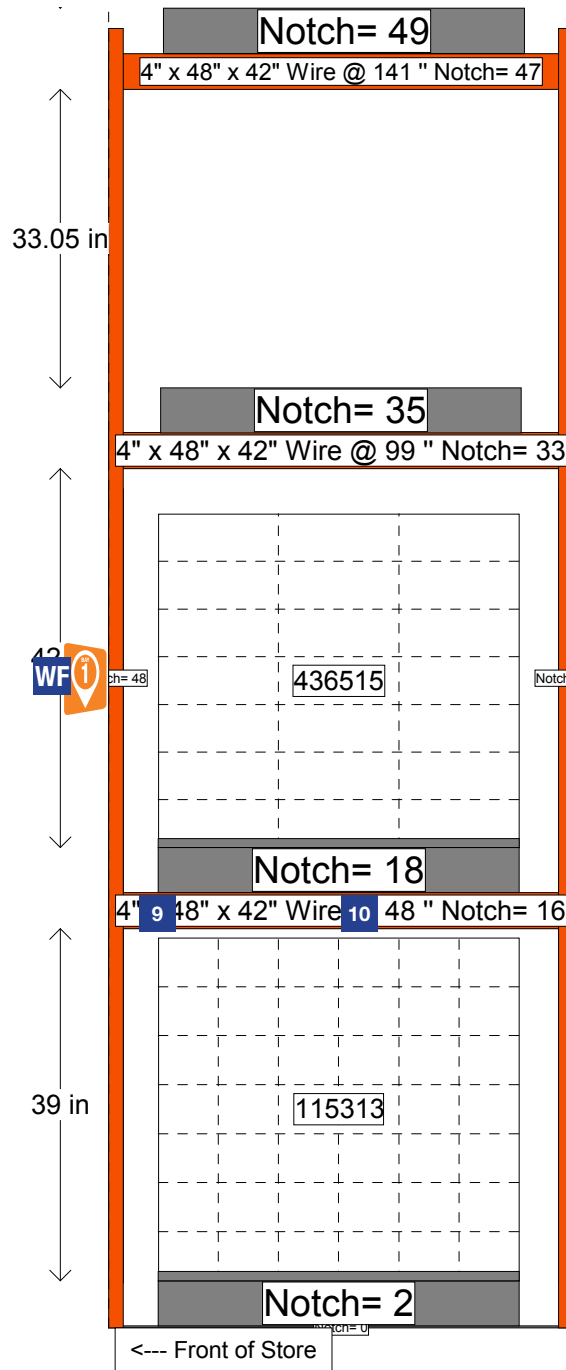

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
9	D22028C-57	Quikrete® Non-Shrink Precision Grout 22.7 KG	1	1000436515	-	ePOP
10	D22028C-31	Quikrete® Mason Mix 36 KG	1	1000115313	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP

Merchandising POG shown is for POP reference only and is not to be used to set product. Refer to your store specific Merchandise POG for product placement.





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.9

EFFECTIVE:
Jan 12, 2017

PAGE:
17 of 30

WF Wayfinding bay number must correspond to bay ID label

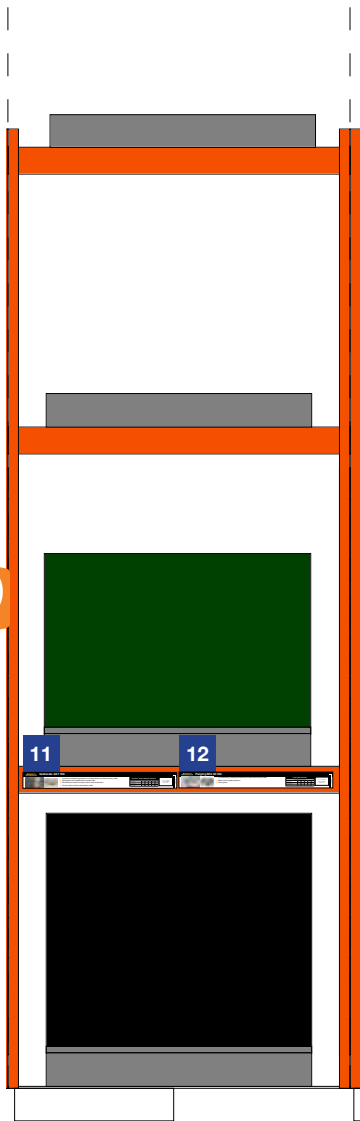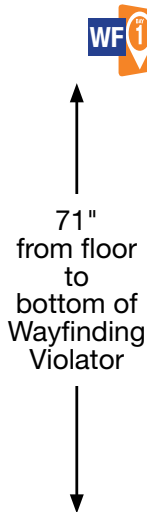

11

QUIKRETE Quikwall® 22.7 KG



- A premium resurfacing product for concrete block and other masonry walls
- Strengthens and waterproofs concrete walls
- Eliminates the need for mortar in block wall construction
- Can be used on interior and exterior walls

Quikwall® Surface Bonding Calculator

Square Feet (m ²)	No. of 22.7kg (50lb) bags required			
	25 (2.3)	50 (4.7)	100 (27.9)	500 (500)
1/8" (3.2mm) thick	1	1	6	30
1/4" (6.4mm) thick	1	2	12	60

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

2" x 1.25" price label
Article #: 100089301
Model #: 123151



12

QUIKRETE Parging Mix 30 KG



- For resurfacing, coating and repairing concrete and masonry walls
- Base coat for repairing stucco
- Strong bond

Parging Mix Calculator

Square Feet (m ²)	No. of 30kg (66 lb) bags required			
	25 (2.3)	50 (4.7)	100 (27.9)	500 (500)
1/8" (3.2mm) thick	1	1	7	35
1/4" (6.4mm) thick	1	2	13	65

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

2" x 1.25" price label
Article #: 100023344
Model #: 115332



Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.9

EFFECTIVE:
Jan 12, 2017

PAGE:
18 of 30

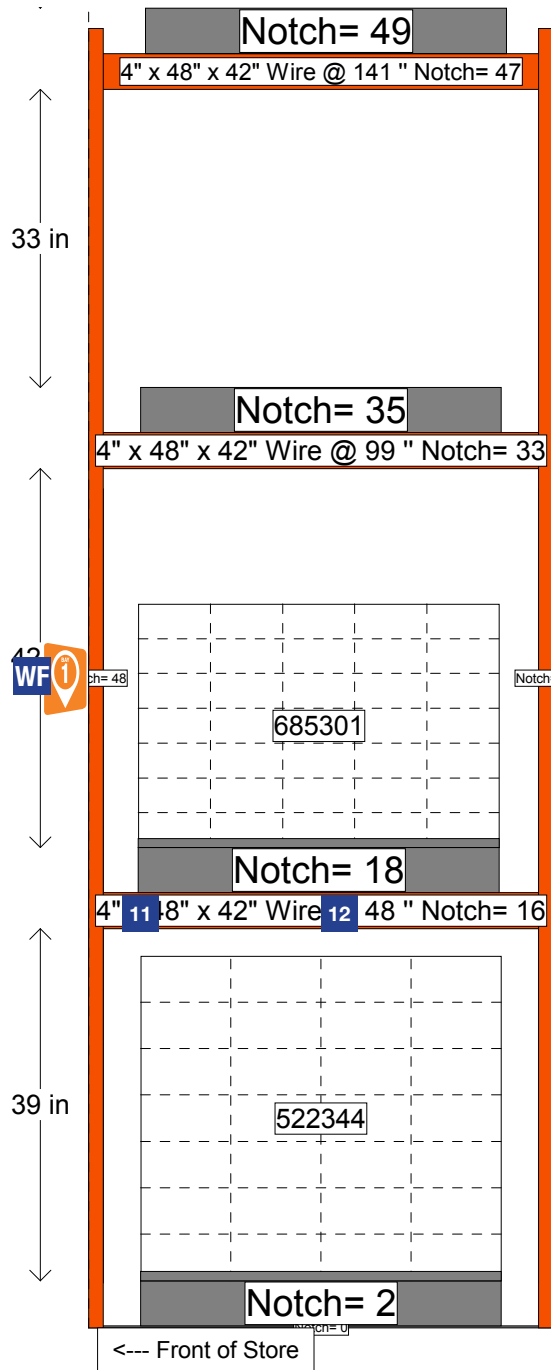

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
11	D22028C-65	Quikrete® Quikwall® 22.7 KG	1	1000685301	-	ePOP
12	D22028C-35	Quikrete® Parging Mix 30 KG	1	1000522344	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP

Merchandising POG shown is for POP reference only and is not to be used to set product. Refer to your store specific Merchandise POG for product placement.





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.10

EFFECTIVE:
Jan 12, 2017

PAGE:
19 of 30

WF Wayfinding bay number must correspond to bay ID label

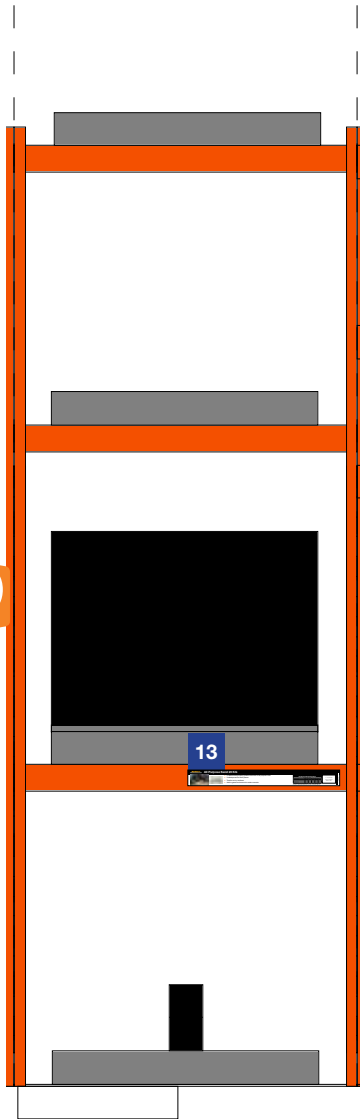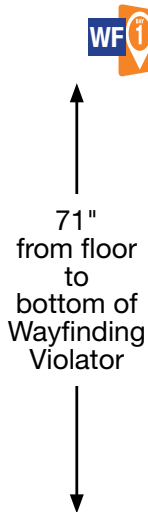

13

QUIKRETE

All Purpose Sand 20 KG



- A washed and properly graded sand with multi purpose uses
- Underlayment for brick pavers
- Traction on icy surfaces
- Add to gravel and cement to make concrete

All Purpose Sand Calculator				
Square Feet (sq)	No. of 20kg (44 lbs) bags			
2 (0.25)	5 (0.5)	10 (0.9)	25 (2.3)	50 (4.6)
1" (25mm) thick	1	1	2	5
2" (50mm) thick	1	2	4	10
4" (100mm) thick	2	4	8	20

2" x 1.25" price label
Article #: 100148536
Model #: 116286



All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.10

EFFECTIVE:
Jan 12, 2017

PAGE:
20 of 30

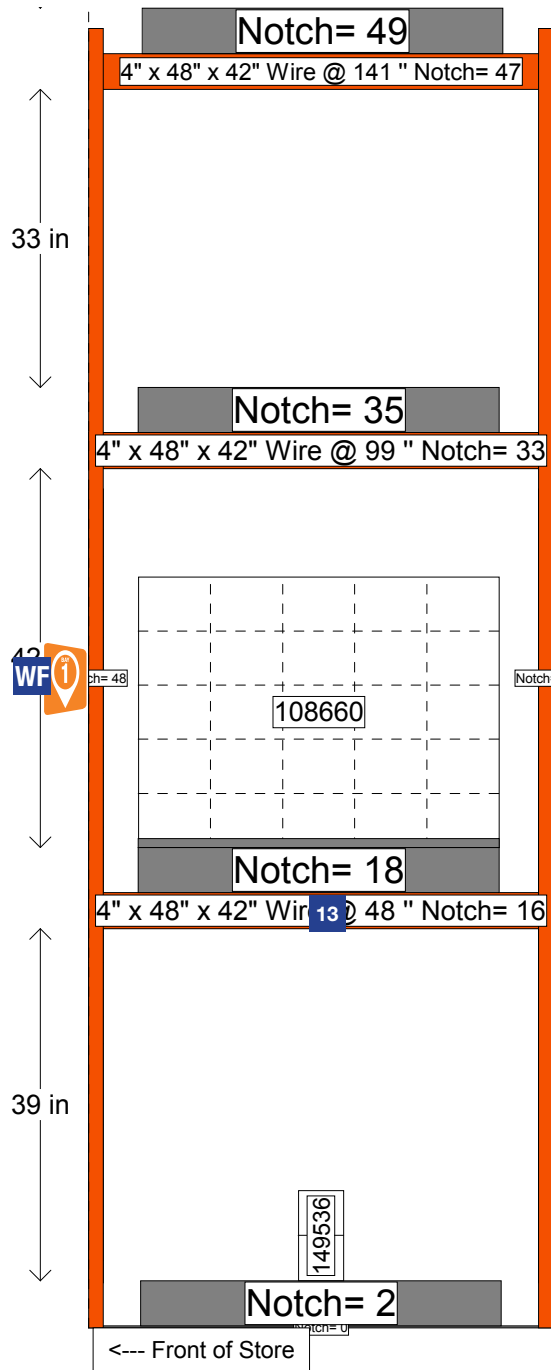

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
13	D22028C-66	Quikrete® All Purpose Sand 20 KG	1	1000149536	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP

Merchandising POG shown is for POP reference only and is not to be used to set product. Refer to your store specific Merchandise POG for product placement.





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete Tools

EFFECTIVE:
Jan 12, 2017

PAGE:
21 of 30

WF Wayfinding bay number must correspond to bay ID label

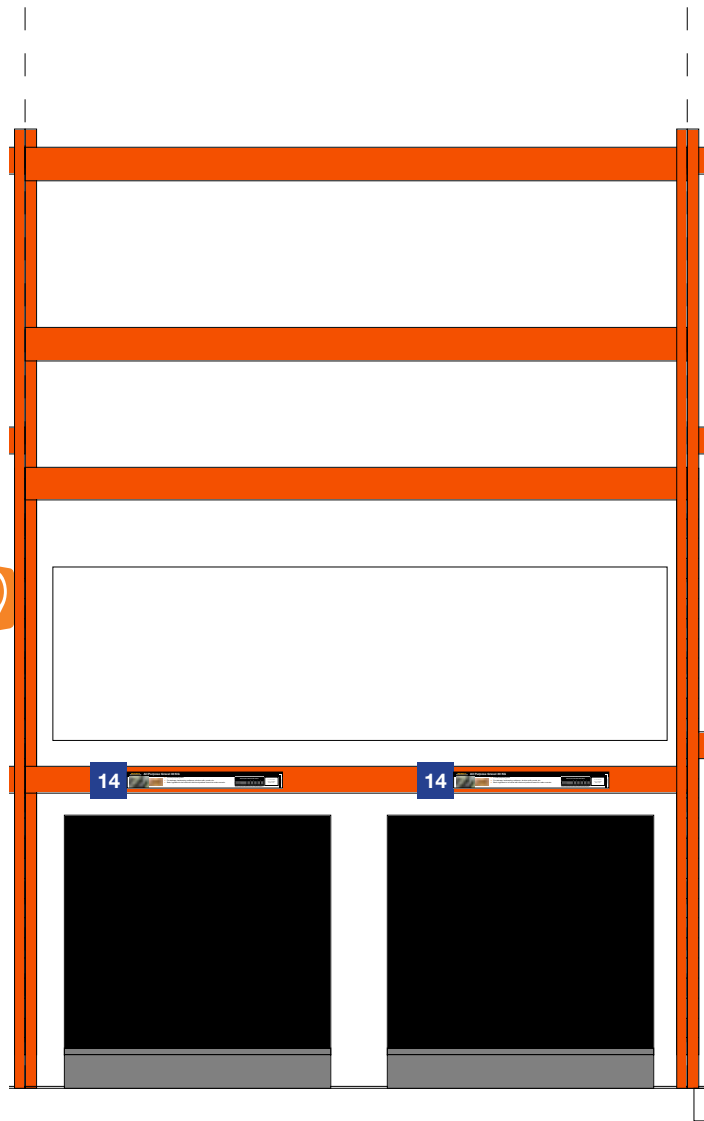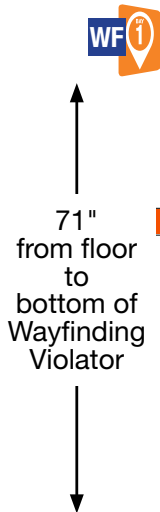

14

QUIKRETE All Purpose Gravel 30 KG



- A multi purpose gravel
- For drainage, landscaping, walkways, window wells, ponds, etc.
- Basic ingredient to be mixed with sand and portland cement to make concrete

All Purpose Gravel Calculator

Square Feet (ft ²)	No. of 30kg (66lb) bags required per square foot				
	2 (0.2)	5 (0.5)	10 (0.9)	25 (2.3)	50 (4.6)
1" (25mm) Thick	1	1	2	4	7
2" (50mm) Thick	1	2	3	7	13
4" (100mm) Thick	1	3	5	13	25

2" x 1.25" price label
Article #: 1000149588
Model #: 119130

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete Tools

EFFECTIVE:
Jan 12, 2017

PAGE:
22 of 30

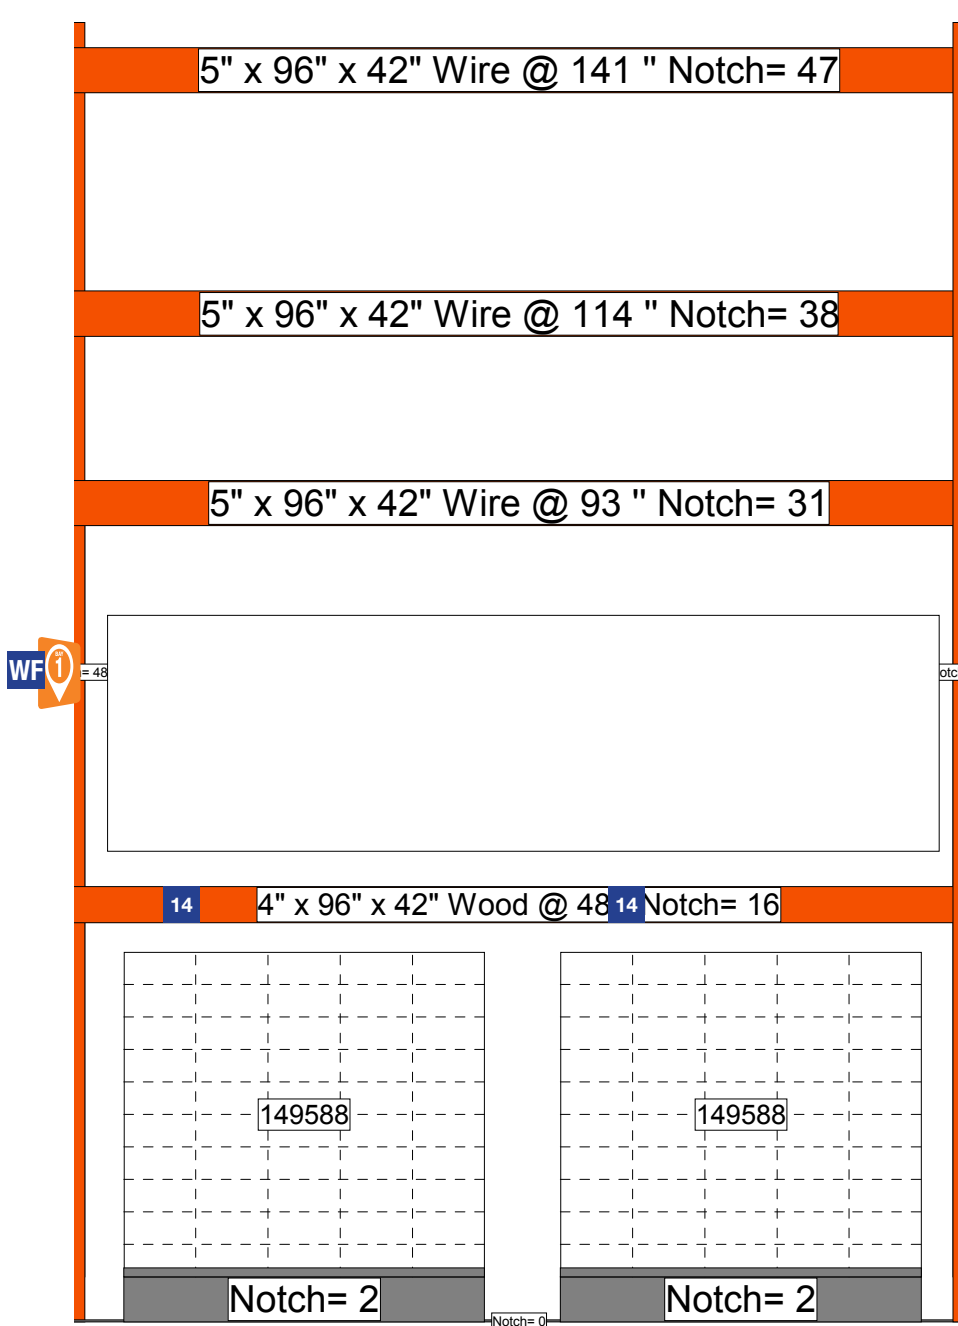

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
14	D22028C-42	Quikrete® All Purpose Gravel 30 KG	2	1000149588	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.11

EFFECTIVE:
Jan 12, 2017

PAGE:
23 of 30

WF Wayfinding bay number must correspond to bay ID label

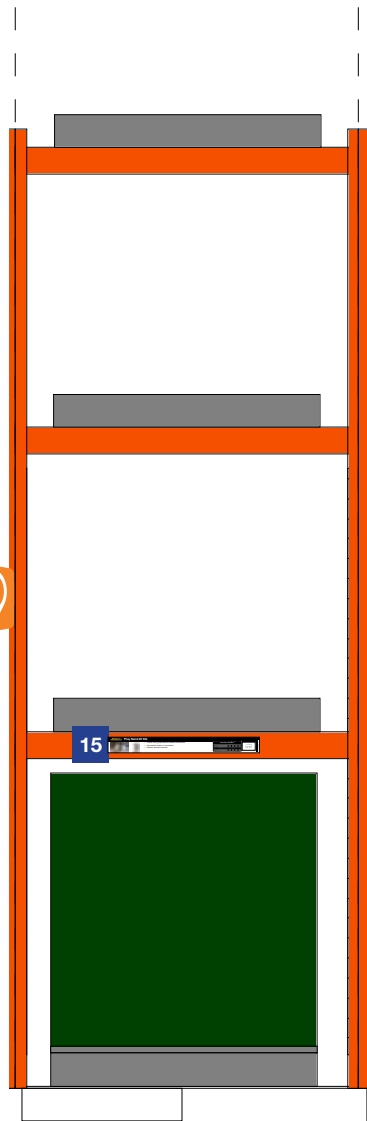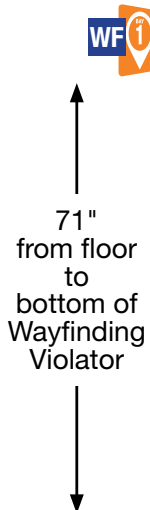

15

QUIKRETE Play Sand 30 KG



- A clean, finely graded sand for children's sand boxes
- Also used for traction on icy surfaces
- Washed, dried and screened

Play Sand® Calculator			
No. of 30kg (66lb) bags required per square foot			
Square Feet (m ²)	9 (0.8)	16 (1.5)	36 (3.3)
Play Box Size	3' x 3'	4' x 4'	6' x 6'
2" (50mm) thick	5	9	19
4" (100mm) thick	7	13	28
6" (150mm) thick	9	17	37

2" x 1.25" price label
Article #: 100148537
Model #: 116386

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.11

EFFECTIVE:
Jan 12, 2017

PAGE:
24 of 30

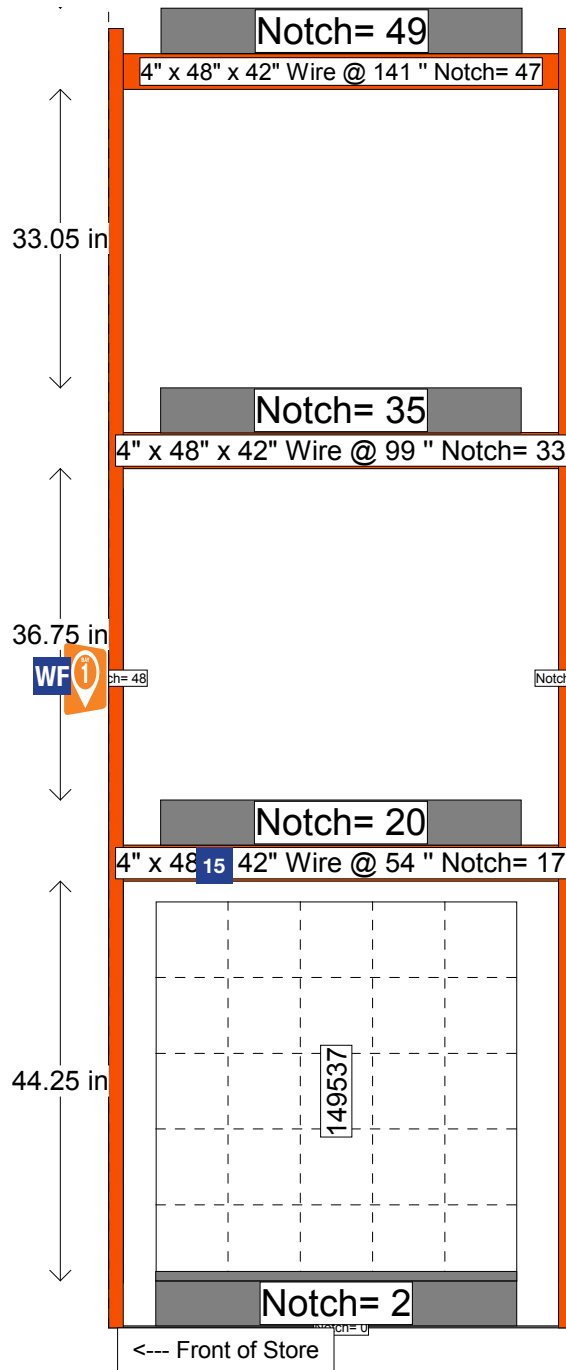

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
15	D22028C-60	Quikrete® Play Sand 30 KG	1	1000149537	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP





Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.12

EFFECTIVE:
Jan 12, 2017

PAGE:
25 of 30

WF Wayfinding bay number must correspond to bay ID label

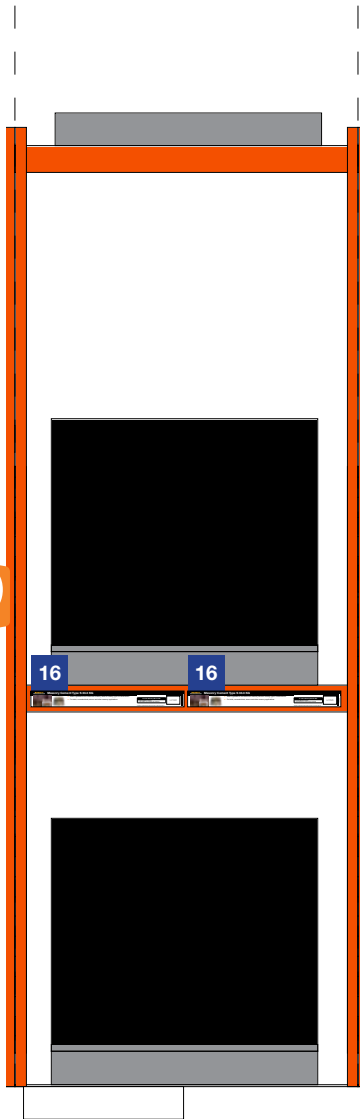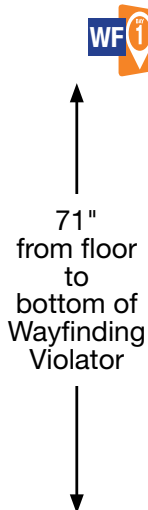

16

QUIKRETE Masonry Cement Type S 33.3 KG



- Basic ingredient to be mixed with masonry sand for making Type S mortar stucco
- For brick, concrete block, stucco and other masonry applications

To make Masonry Mortar Mix

- 3 parts Masonry Sand
- 1 part Masonry Cement (by volume)

2" x 1.25" price label
Article #: 1000438529

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.12

EFFECTIVE:
Jan 12, 2017

PAGE:
26 of 30

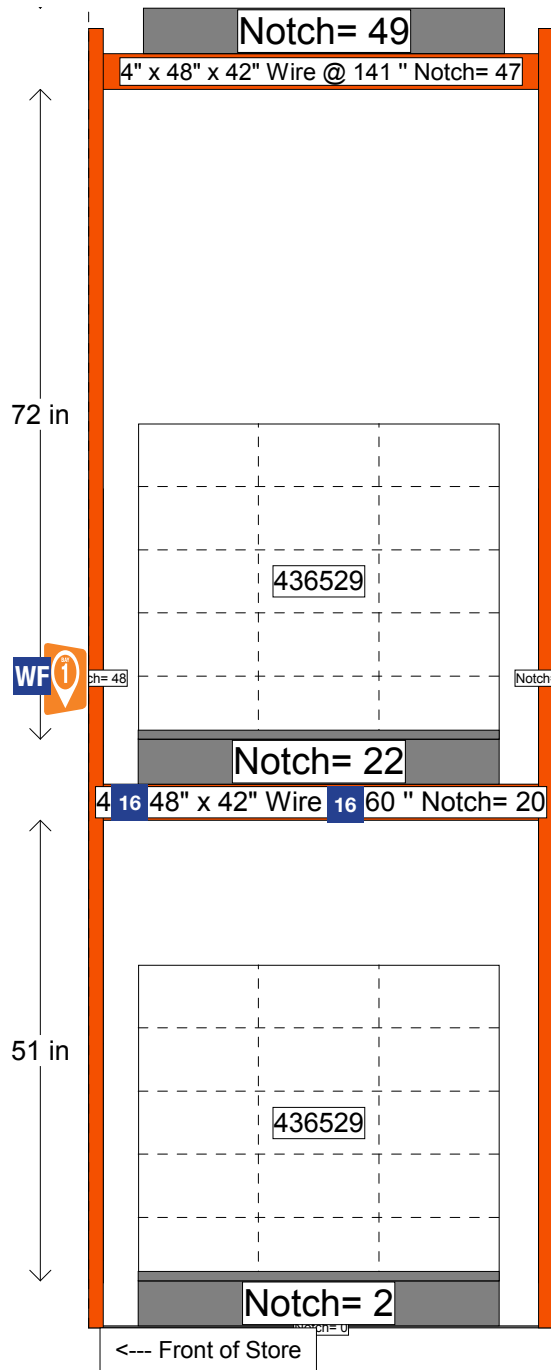

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
16	D22028C-50	Quikrete® Masonry Cement Type S 33.3 KG	2	1000436529	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP

Merchandising POG shown is for POP reference only and is not to be used to set product. Refer to your store specific Merchandise POG for product placement.




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.13

EFFECTIVE:
Jan 12, 2017

PAGE:
27 of 30

WF Wayfinding bay number must correspond to bay ID label

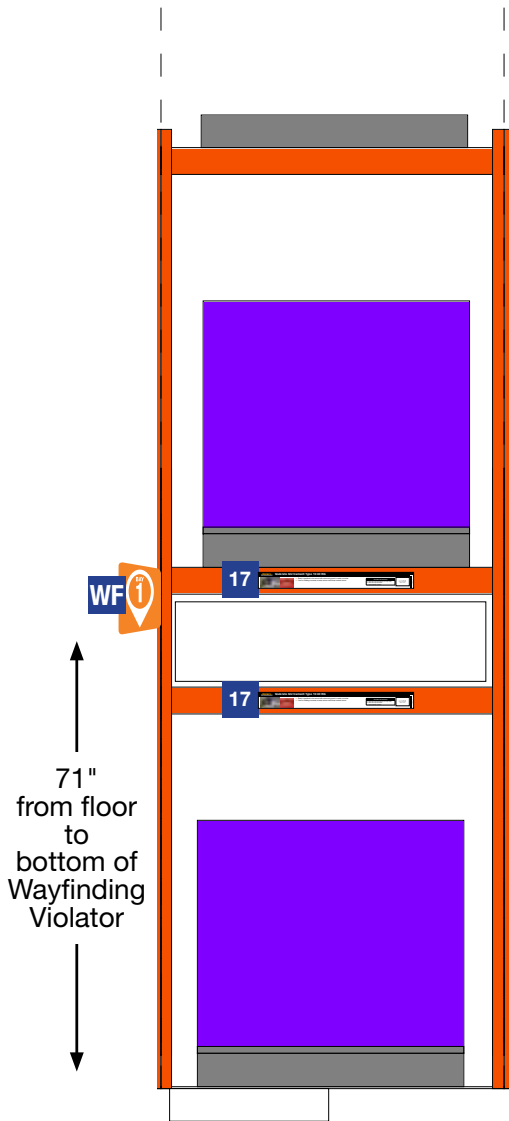

17

QUIKRETE Quikrete GU Cement Type 10 40 KG



- Basic ingredient to be mixed with sand and gravel to make concrete
- Use for making concrete, mortar, stucco and other cement mixes

To make concrete mix

- 3 parts All Purpose Gravel (1/2" top size)
- 2 parts All Purpose Sand
- 1 part Portland Cement

2" x 1.25" price label
Article #: 1000149591
Model #: 124440



Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.13

EFFECTIVE:
Jan 12, 2017

PAGE:
28 of 30

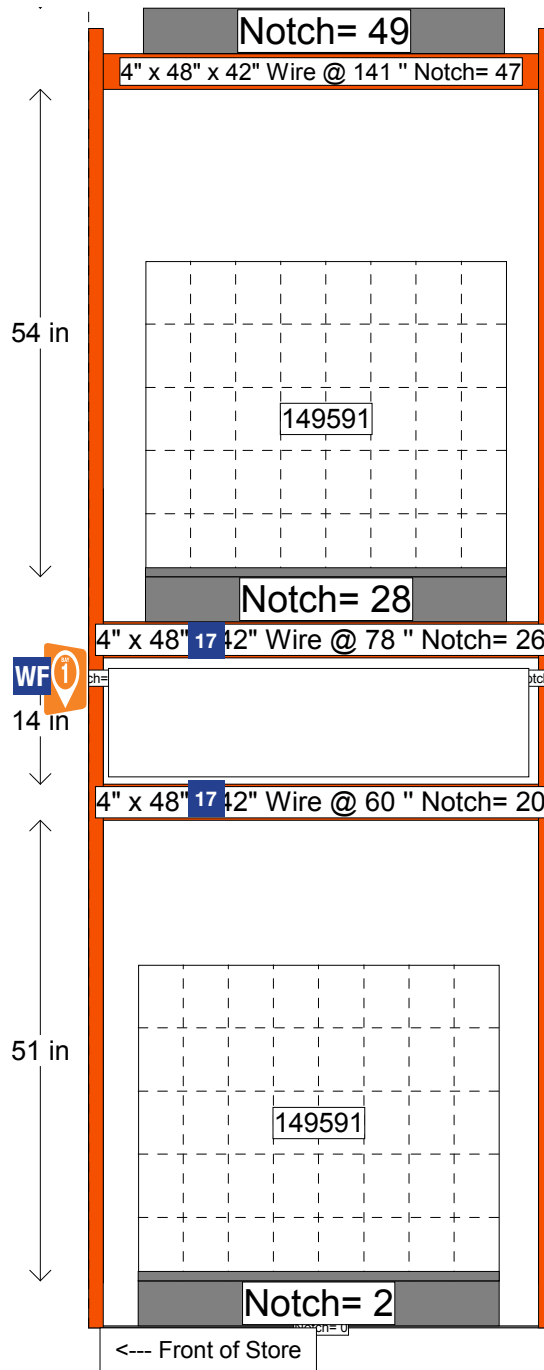

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
17	D22028C-46	Quikrete® GU Cement Type 10 40 KG	2	1000149591	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP

Merchandising POG shown is for POP reference only and is not to be used to set product. Refer to your store specific Merchandise POG for product placement.




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.14

EFFECTIVE:
Jan 12, 2017

PAGE:
29 of 30

WF Wayfinding bay number must correspond to bay ID label

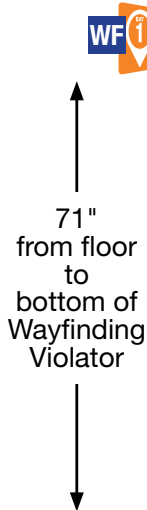

18

QUIKRETE Blacktop Patch 30 KG



- For repairing potholes and large cracks in asphalt
- Does not require heating or mixing
- Patched area ready for immediate use

Blacktop Patch Calculator					
Square Feet (sq ft)	No. of 30kg (66lb) bags				
	2 (0.2)	4 (0.4)	6 (0.6)	8 (0.7)	12 (1.1)
1" (25mm) thick	1	1	1	2	2
2" (50mm) thick	1	2	2	3	4
3" (75mm) thick	1	2	3	4	6

2" x 125" price label
Article #: 1000149544
Model #: 170130

All yields are approximate and do not allow for waste or uneven sub-grade, etc.

Instructions:

- [Wayfinding Violator] Install Wayfinding Violator using wayfinding clip so bottom edge is 71" above the floor
- [Beam Labels] Remove any old beam labels (if applicable) and place label on the beam below the product
For products on bottom shelf, place label on the beam above the product




Sign Planogram: Concrete - Quikrete

Bay Name: Concrete 14.14

EFFECTIVE:
Jan 12, 2017

PAGE:
30 of 30

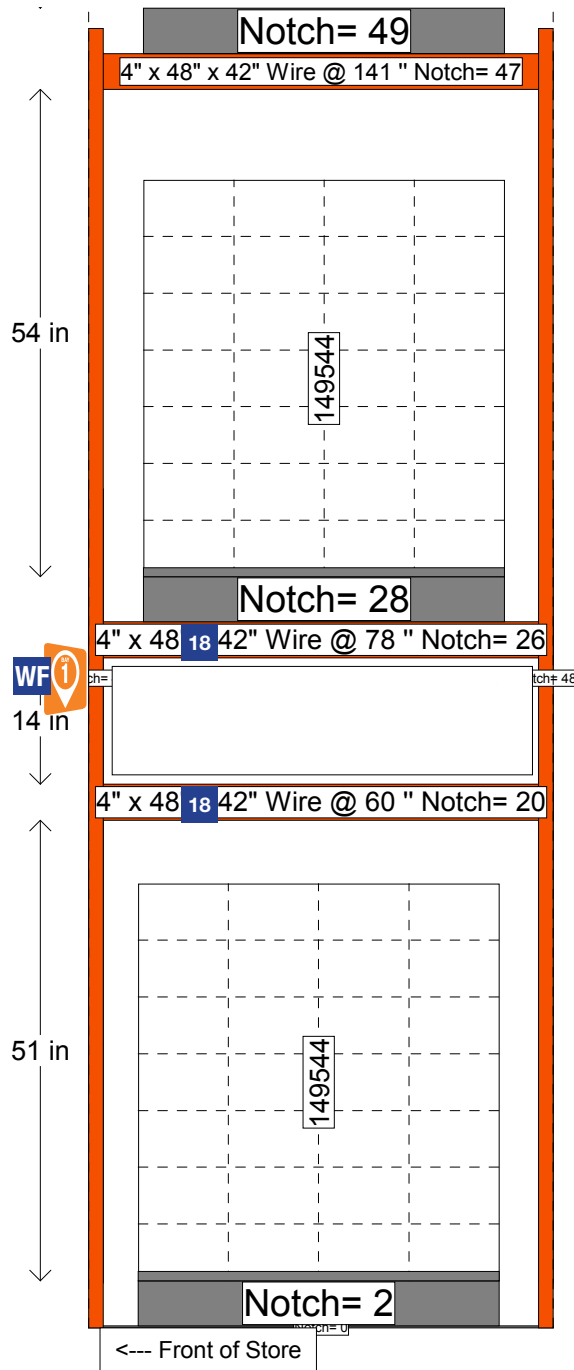

In Bay Signage Requirements

Item #	Part #	Description	Quantity	HD Article #	Hardware Requirements	How to Order
18	D22028C-40	Quikrete® Blacktop Patch 30 KG	2	1000149544	-	ePOP
WF	Varies by bay ID #	Wayfinding Violator	1	-	Wayfinding Clip	ePOP
-	124-300TESA	Wayfinding Clip	1	-	-	ePOP